

Powered by



RG0690T2

6V 9Ah

RG0690T2 is a general purpose battery up to 5 years in standby service or more than 260 cycles at 100% discharge in cycle service. As with all Raion Power lead acid batteries, all are rechargeable, highly efficient, leak proof and maintenance free.




► Specification

Cells Per Unit	3
Voltage Per Unit	6
Capacity	9Ah @ 20hr-rate to 1.75V per cell @25°C (77°F)
Weight	Approx. 1.3 kg(2.86 lbs)
Maximum Discharge Current	120A(5sec)
Internal Resistance	Approx. 7.5 mΩ
Operating Temperature Range	Discharge: -15°C~50°C (5°F~122°F) Charge: -15°C~40°C (5°F~104°F) Storage: -15°C~40°C (5°F~104°F)
Nominal Operating Temperature Range	25°C±3°C (77°F±5°F)
Float Charging Voltage	6.75 to 6.9 VDC/unit Average at 25°C (77°F)
Recommended Maximum Charging Current Limit	2.4A
Equalization and Cycle Service	7.2 to 7.5 VDC/unit Average at 25°C (77°F)
Self Discharge	This battery can be stored for more than 6 months at 25°C (77°F). Please charge batteries before using. For higher temperatures the time interval will be shorter.
Terminal	F2-Faston Tab 250
Container Material	ABS(UL 94-HB) & Flammability resistance of (UL 94-V0) can be available upon request.

► Dimensions :

Unit: mm

Overall Height (H)	Container height (h)	Length (L)	Width (W)
98±1.5	93	151±2	34±1

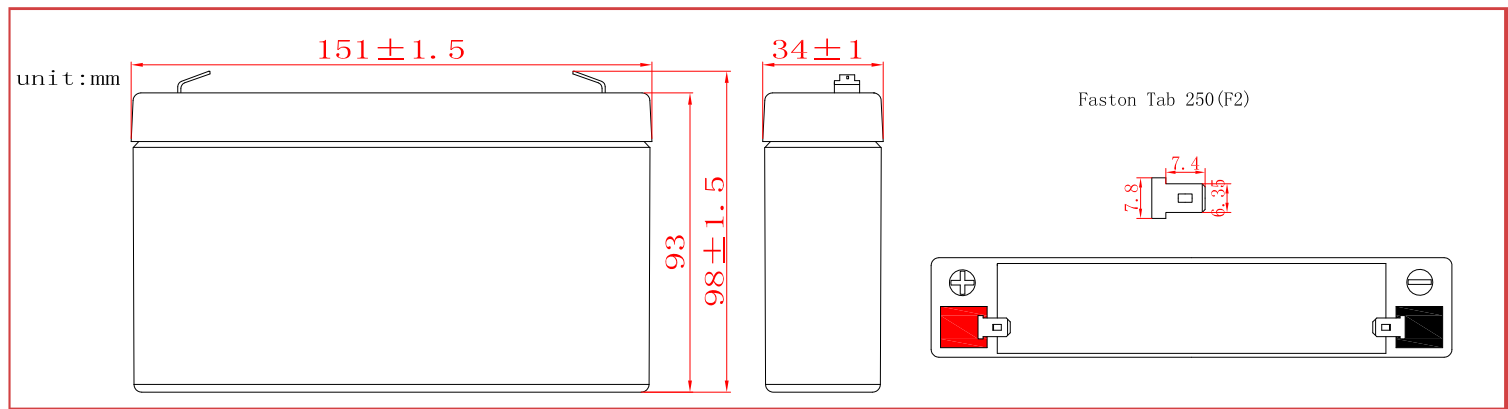

Constant Current Discharge Characteristics Unit:A (25°C, 77°F)


F.V/Time	5min	15min	30min	1h	3h	5h	10h	20h
1.60V	32.5	15.3	9.16	5.24	2.32	1.59	0.868	0.464
1.67V	30.3	14.7	8.95	5.09	2.30	1.57	0.863	0.459
1.7V	28.7	14.1	8.78	5.01	2.28	1.54	0.855	0.455
1.75V	27.0	13.1	8.55	4.88	2.25	1.52	0.846	0.450
1.8V	24.0	12.5	8.08	4.72	2.19	1.46	0.826	0.437
1.85V	21.6	11.4	7.32	4.57	2.06	1.37	0.793	0.423

Constant Power Discharge Characteristics Unit:W (25°C, 77°F)


F.V/Time	5min	15min	30min	1h	3h	5h	10h	20h
1.60V	59.7	29.0	17.7	10.31	4.57	3.13	1.708	0.919
1.67V	56.4	28.4	17.5	10.12	4.61	3.11	1.711	0.916
1.7V	53.2	27.0	17.1	9.91	4.53	3.07	1.695	0.908
1.75V	50.1	25.1	16.7	9.65	4.48	3.02	1.674	0.902
1.8V	44.5	23.9	15.8	9.33	4.36	2.91	1.635	0.872
1.85V	40.4	22.0	14.4	9.11	4.14	2.76	1.584	0.852

Ratings presented herein are subject to revision without notice.


Trickle(or Float)Design Life

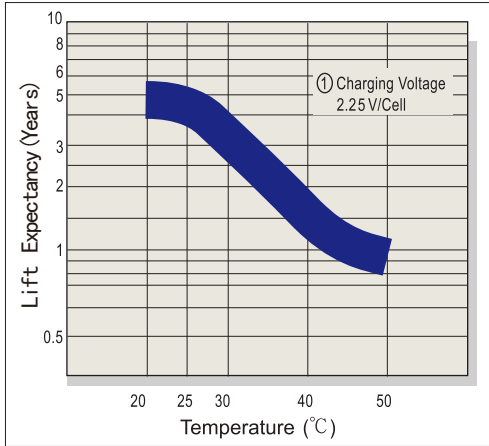


Capacity Retention Characteristic

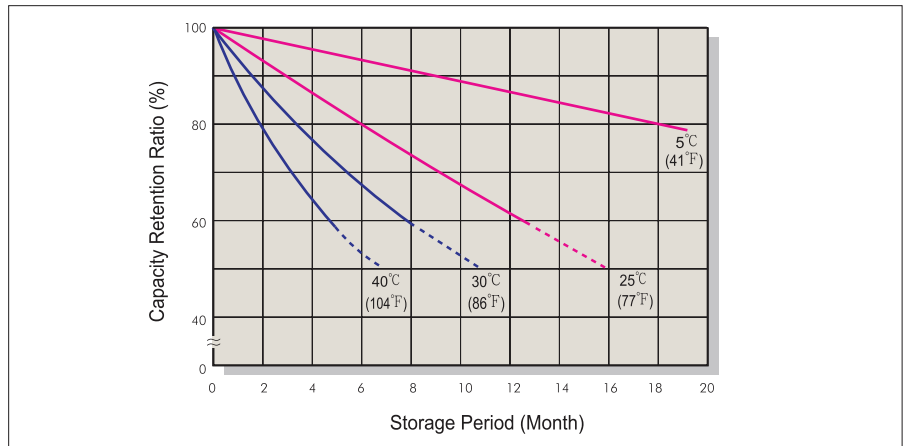


Battery Voltage and Charge Time for Standby Use

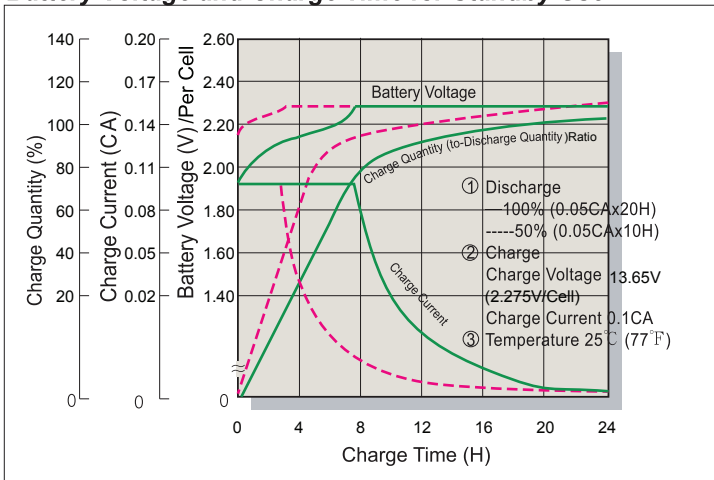


Cycle Service Life

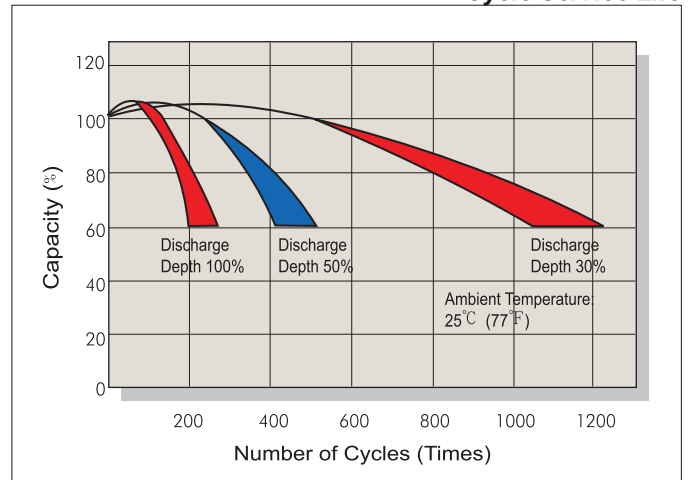

Battery Voltage and Charge Time for Cycle Use

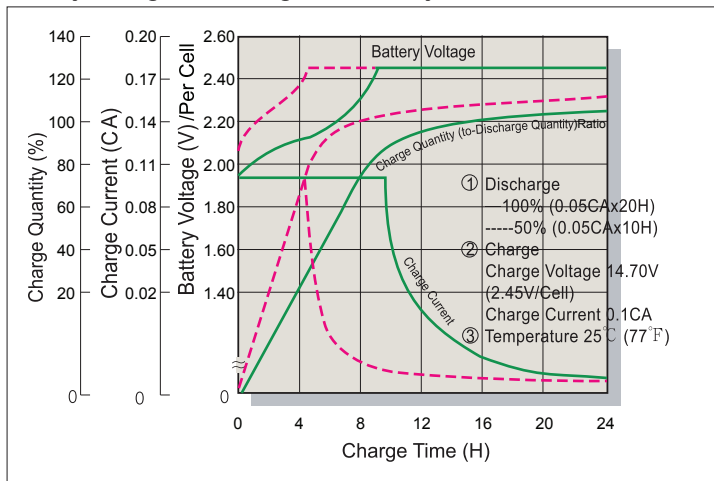

Terminal Voltage (V) and Discharge Time

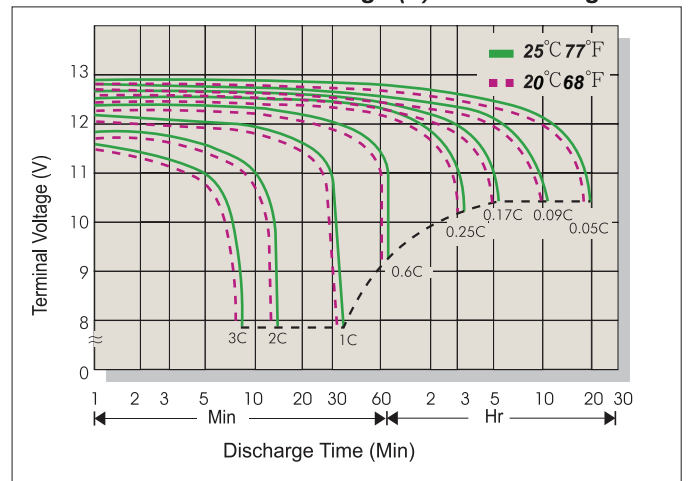

Charging Procedures

Application	Charge Voltage(V/Cell)			Max.Charge Current
	Temperature	Set Point	Allowable Range	
Cycle Use	25°C (77°F)	2.45	2.40~2.50	0.3C
Standby	25°C (77°F)	2.275	2.25~2.30	

Discharge Current VS. Discharge Voltage

Final Discharge Voltage V/Cell	1.75	1.70	1.60	1.30
Discharge Current(A)	0.2C>(A)	0.2C<(A)<0.5C	0.5C<(A)<1.0C	(A)>1.0C

Effect of temperature on capacity (20HR)

Temperature	Dependency of Capacity (20HR)
40 °C	102%
25 °C	100%
0 °C	85%
-15 °C	65%

Self-discharge Characteristics

Charge Voltage(V/Cell)	Charge Voltage(V/Cell)
3 Months	91%
6 Months	82%
12 Months	64%